


5670 LA COSTA CANYON COURT LAS VEGAS, NV., 89139 702-798-4521 (Office) 702-798-7064 (Fax) contact@snaploc.com

## Cargo Net Manual FOR LOAD FLOOR AND OR CARGO BED (INTERIOR OR EXTERNAL USE)

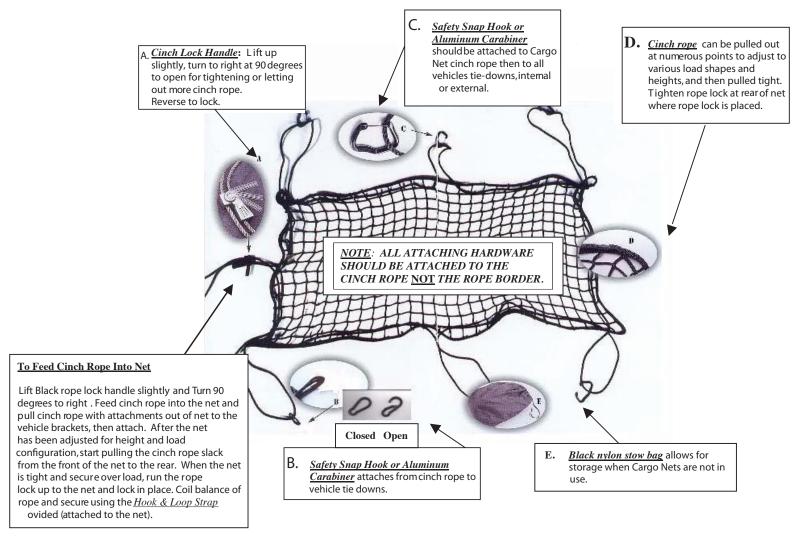

## Limitations

Cargo Net Working Load Limit is 400 lbs of evenly distributed contained weight with a minimum of 4 connection points. Do not over tighten; this may cause damage to net, rope, cinch, cargo and anchor points. Though cargo net can be used almost anywhere, it is your responsibility to determine suitability of this product for any particular use. This product is only as strong as stated when what you anchor them to is as equally strong. Cargo net is subject to damage by elements of weather and may void the warranty. Cargo Net should be regularly inspected and replaced if worn or damaged. Continuous exposure to ultra-violet light, extreme cold or extreme heat can degrade the strength. Storage of net should be in a dry place not susceptible to elements of weather. Do not exceed "Working Load Limit". Always keep in mind that "Dynamic G-Forces" will compromise weight limits such as quickly reducing the speed at which the cargo is traveling and wind resistance. "Working Load Limit" is the maximum load a component or assembly should be subjected to during routine use. All ratings are based on the product being new and with usage in average environmental conditions. For any particular use, check with applicable industry, trade association, federal, state and/or local regulations. Always read and follow all installation and usage instructions carefully. Do not expose to sharp edges, acids, chemicals or items that may cause damage. Products are subject to age, wear and deterioration which can cause a reduction in the products working load limit. When traveling, we recommend periodically checking cargo and net to insure they are safely secure. If secured cargo has sharp edges or is subject to omitting heat or chemicals it may cause failure of net. If there are any further questions contact your local Snap-Loc dealer or one of our customer service representatives.

## Warranty

Cargo Net and system Accessories are warranted to be free from defects in material and workmanship for a period of 90 days (warranty period) from date of purchase, or if you placed a special order with us from date of receipt of product. Some items may have up to a 1 year warranty depending on store of purchase (check with Snap-Loc or store of purchase). During the warranty period Snap-Loc will, at its option, repair or replace without charge any part of our product found to be defective in material or workmanship (shipping cost may be subject to charge). This warranty does not extend to any product which has been subject to misuse, abuse, negligence, accident, alteration, improper installation, over tightening, superseding recommended weight limits, scratches, discoloring, or unauthorized repair. If product becomes structurally damaged immediately discontinue use. In no way will Snap-Loc Cargo Control Systems, LLC (Snap-Loc) be liable for special, direct, indirect or consequential damages, loss of vehicle, cargo, profits, personal injury, death or the like for any reason. Please contact our customer service department or the store of purchase for more details. The literature included with this product has been written for your safety. If you do not accept the terms and conditions herein do not use this product and return it within 7 days after purchase. By keeping this product you are agreeing to these terms and conditions. If returning products, return them to the store of purchase within the warranty period. No returns will be accepted after the warranty period unless special provisions have been made with the store of purchase (see store of purchase for further details). If you purchased your product directly from Snap-Loc please contact the Snap-Loc Customer Service Department for a Return Merchandise Authorization (RMA) number and return shipping instructions. Products returned to Snap-Loc without an RMA number will not be accepted. After receipt of an RMA number, the defective product must be returned to